



THIS DOCUMENT AND THE INFORMATION CONTAINED IN IT ARE PROPRIETARY AND CONFIDENTIAL TO *CDN Technologies Ltd.*. NO PERSON IS ALLOWED TO COPY, REPRINT, REPRODUCE OR PUBLISH ANY PART OF THIS DOCUMENT, NOR DISCLOSE ITS CONTENTS TO OTHERS, NOR MAKE ANY USE OF IT, NOR ALLOW OR ASSIST OTHERS TO MAKE ANY USE OF IT - UNLESS BY THE PRIOR WRITTEN EXPRESS AUTHORIZATION OF *CDN Technologies Ltd.* AND THEN ONLY TO THE EXTENT AUTHORIZED.
(C) COPYRIGHT - *CDN Technologies Ltd.*

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
C	SPEC UPDATE	13/01/21	D.C

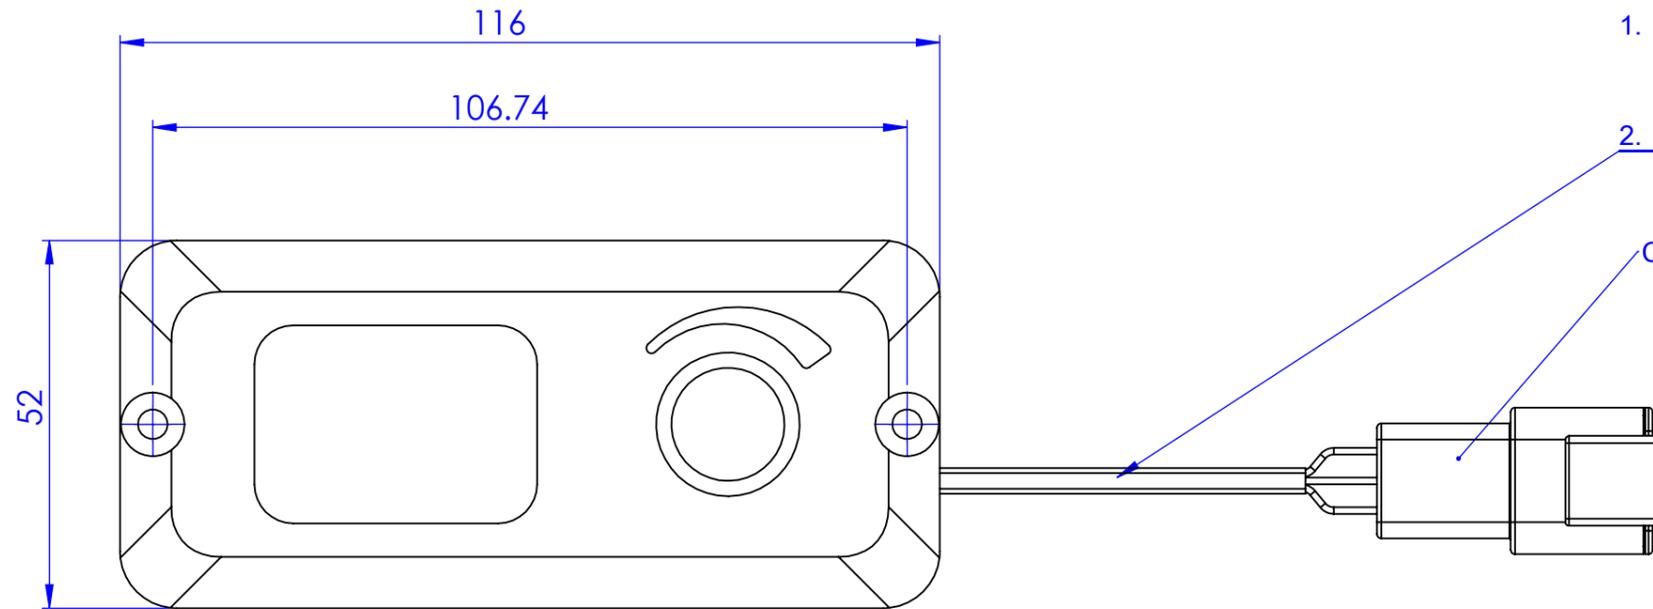

1. WIRE TYPE:
LENGTH: 200 - 220mm
PVC 22 AWG; approved AWM UL Style. Voltage Rating $\geq 300V$
WIRE COLOR: RED = "+"; BLACK = GND "-"
2. INSULATION : SHRINK TUBE-5mm- BLACK UL APPROVED


CONNECTOR:
DEUTSCH DTM04-3P
PIN #1: + 10 to 32VD WHITE LIGHT
PIN #2: GND
PIN #3: N/A
PIN P/N: 0460-202-20141
LOKING WDGE: WM-3P

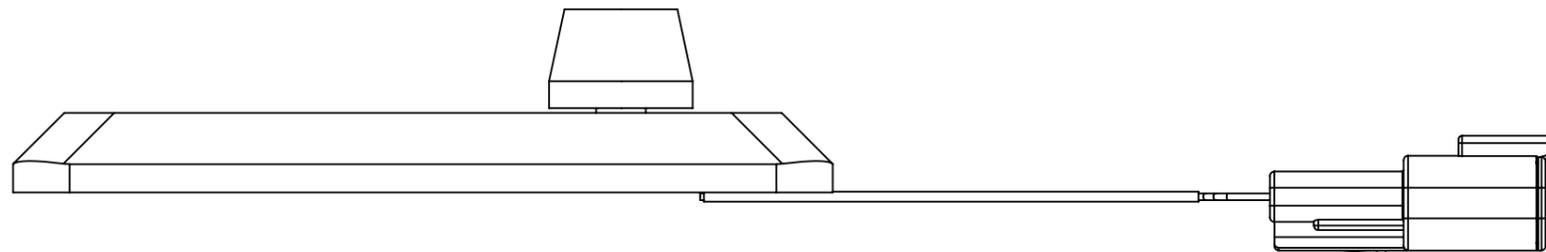

P/N: VD5-0900-CW-B-DTM04-3P

Dimming 0-100% of light intensity
Clear transparent window
Main light white color: CW 5500K -6000K
Frame Finish: Black Anodize
Secondary light color: NONE
Wire requirement: DTM04-3P CONNECTOR

Power Consumption: 0 to 3W
Light Output: 0 to 400 lm
Input Voltage: 12VDC
Operating Temperature: -35°C to +54°C
Operating Humidity: 5% to 95%
Dimensions: 116x52mm
Weight: 100g

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN mm		Material	-			Ben-Shemen #32 Zip: 73115	
		Finish	-			Tel: 972 -52-511-8159 Sales@led-r.com	
TOLERANCES		DWG			TITLE	VD5-0900-CW-B-DTM04-3P	
LINEAR	ANGULAR	DSGN	D.C.	12/10/2020			
± 0.2	± 0.2	CHKD	D.C.				
1st. ANGLE PROJECTION		QTY:	1		SIZE	PROJ NAME	DWG NO
		FILE NAME:			A3		20101201
		VD5-0900 REV C DIM TOP LIGHT ASM			SCALE: 1:1		REMOVE BURRS 0.2 x 45°
(C) <i>CDN Technologies Ltd.</i>							SHEET 1 OF 1